



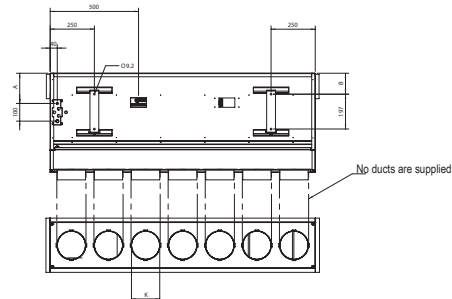


CYVS_DK_RBN/RSN
 CYVM_DK_RBN/RSN
 CYVL_DK_RBN/RSN

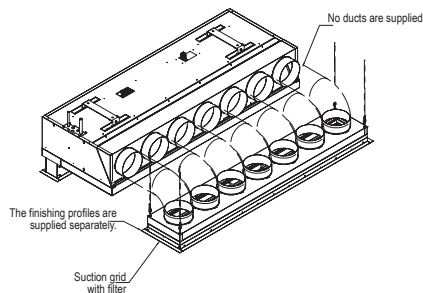

Number of ducts per device

Type	1000	1500	2000	2500
CYVS-DK-RBN/RSN	5	7	10	12
CYVM-DK-RBN/RSN	5	7	10	12
CYVL-DK-RBN/RSN	3	5	6	8

Number of suction grids per device

Device length	Number	Suction grid length
1000 / 1500	1	1,000 / 1,500
2000 / 2500	2	1,000 / 1,250

*1 drain grid per device

Type	L	H	D	S	U	A	B	E	F	G	J	K	M	T
CYVS-DK-RBN/RSN	1,000 - 1,500	270	561	80-125	90	171	119	92	139	260	308	Ø160	1044-1544 2044-2544	1048-1548 2048-2548
CYVM-DK-RBN/RSN	2,000 - 2,500													
CYVL-DK-RBN/RSN	1,000 - 1,500 2,000 - 2,500	370	745	80-125	121.5	245.5	200	123.5	170	360	408	Ø250	1044-1544 2044-2544	1048-1548 2048-2548

REMARKS

- The 2,500mm large devices have 3 suspension brackets, where the third bracket is mounted at half the length of the device.
- Holes (for finishing profiles) - drain (L+8) x (E+8) mm - suction (L+8) x (G+8) mm.

CU0956X-000