


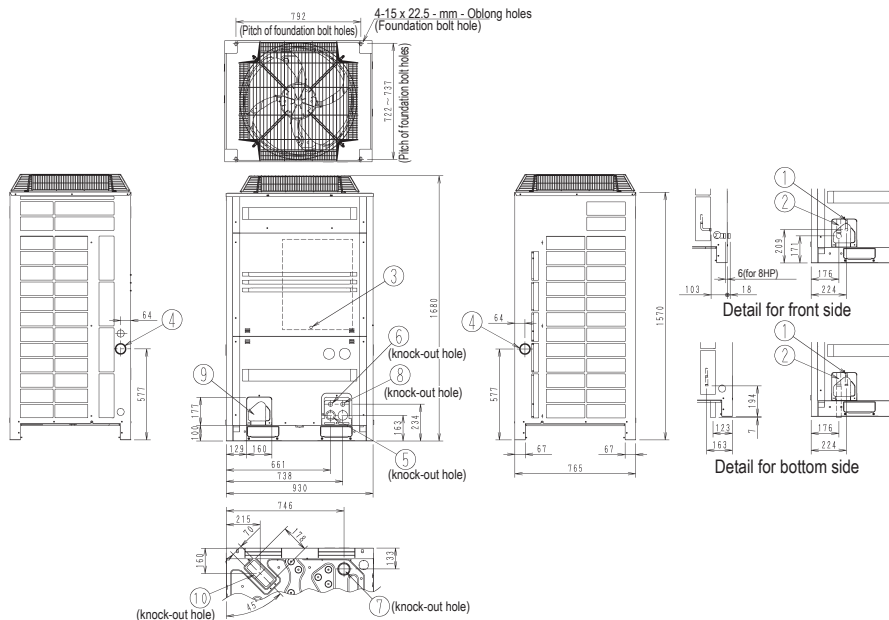

3D051449P

No.	Parts name	Remarks
1	Liquid pipe connection port	See note 2
2	Gas pipe connection port	See note 2
3	Grounding terminal	Inside of switch box (M8)
4	Power cord routing hole (side)	ø 62
5	Power cord routing hole (front)	ø 45
6	Power cord routing hole (front)	ø 27
7	Power cord routing hole (bottom)	ø 66.5
8	Wire routing hole (front)	ø 27
9	Pipe routing hole (front)	
10	Pipe routing hole (bottom)	

NOTES

- Detail for front side and detail for bottom side indicate the dimensions after fixing the attached piping.
- Gas pipe (Heat pump type)
 - ø 19.1 Brazing connection 8PY1, YL, 8PAY1(S), Y6, YL, YLD(9), 200KY1, 8PTLK, 8PYNK, 8PRY6 type RQYQ8PY1, PY1B, RXYQ8PYLT, RXYQ8PTLT, RZQS180 • 200AY1, RZQ180 • 200LY1
 - ø 22.2 Brazing connection 10PY1, YL, 10PAY1(S), Y6, YL, YLD, 10PRY6 type RQYQ10PY1, PY1B, RXYQ10PYLT, RXYQ10PTLT, RZQ250LY1
 - ø 28.6 Brazing connection RQYQ12PY1, PY1B
- Liquid pipe (Heat pump type)
 - ø 9.5 Brazing connection 8 • 10PY1, YL, 8 • 10PAY1(S), Y6, YL, YLD(9), 200KY1, 8PTLK, 8PYNK, 8 • 10PRY6 type RQYQ8 • 10PY1, PY1B, RXYQ8 • 10PYLT, RXYQ8 • 10PTLT, RZQS180 • 200AY1, RZQ180 • 200 • 250LY1
 - ø 12.7 Brazing connection RQYQ12PY1, PY1B